


**Vacuum cleaners
with direct drive
Type DA 5150:
Top performance
and advanced
technology**




Vacuum cleaners with direct drive Type DA 5150

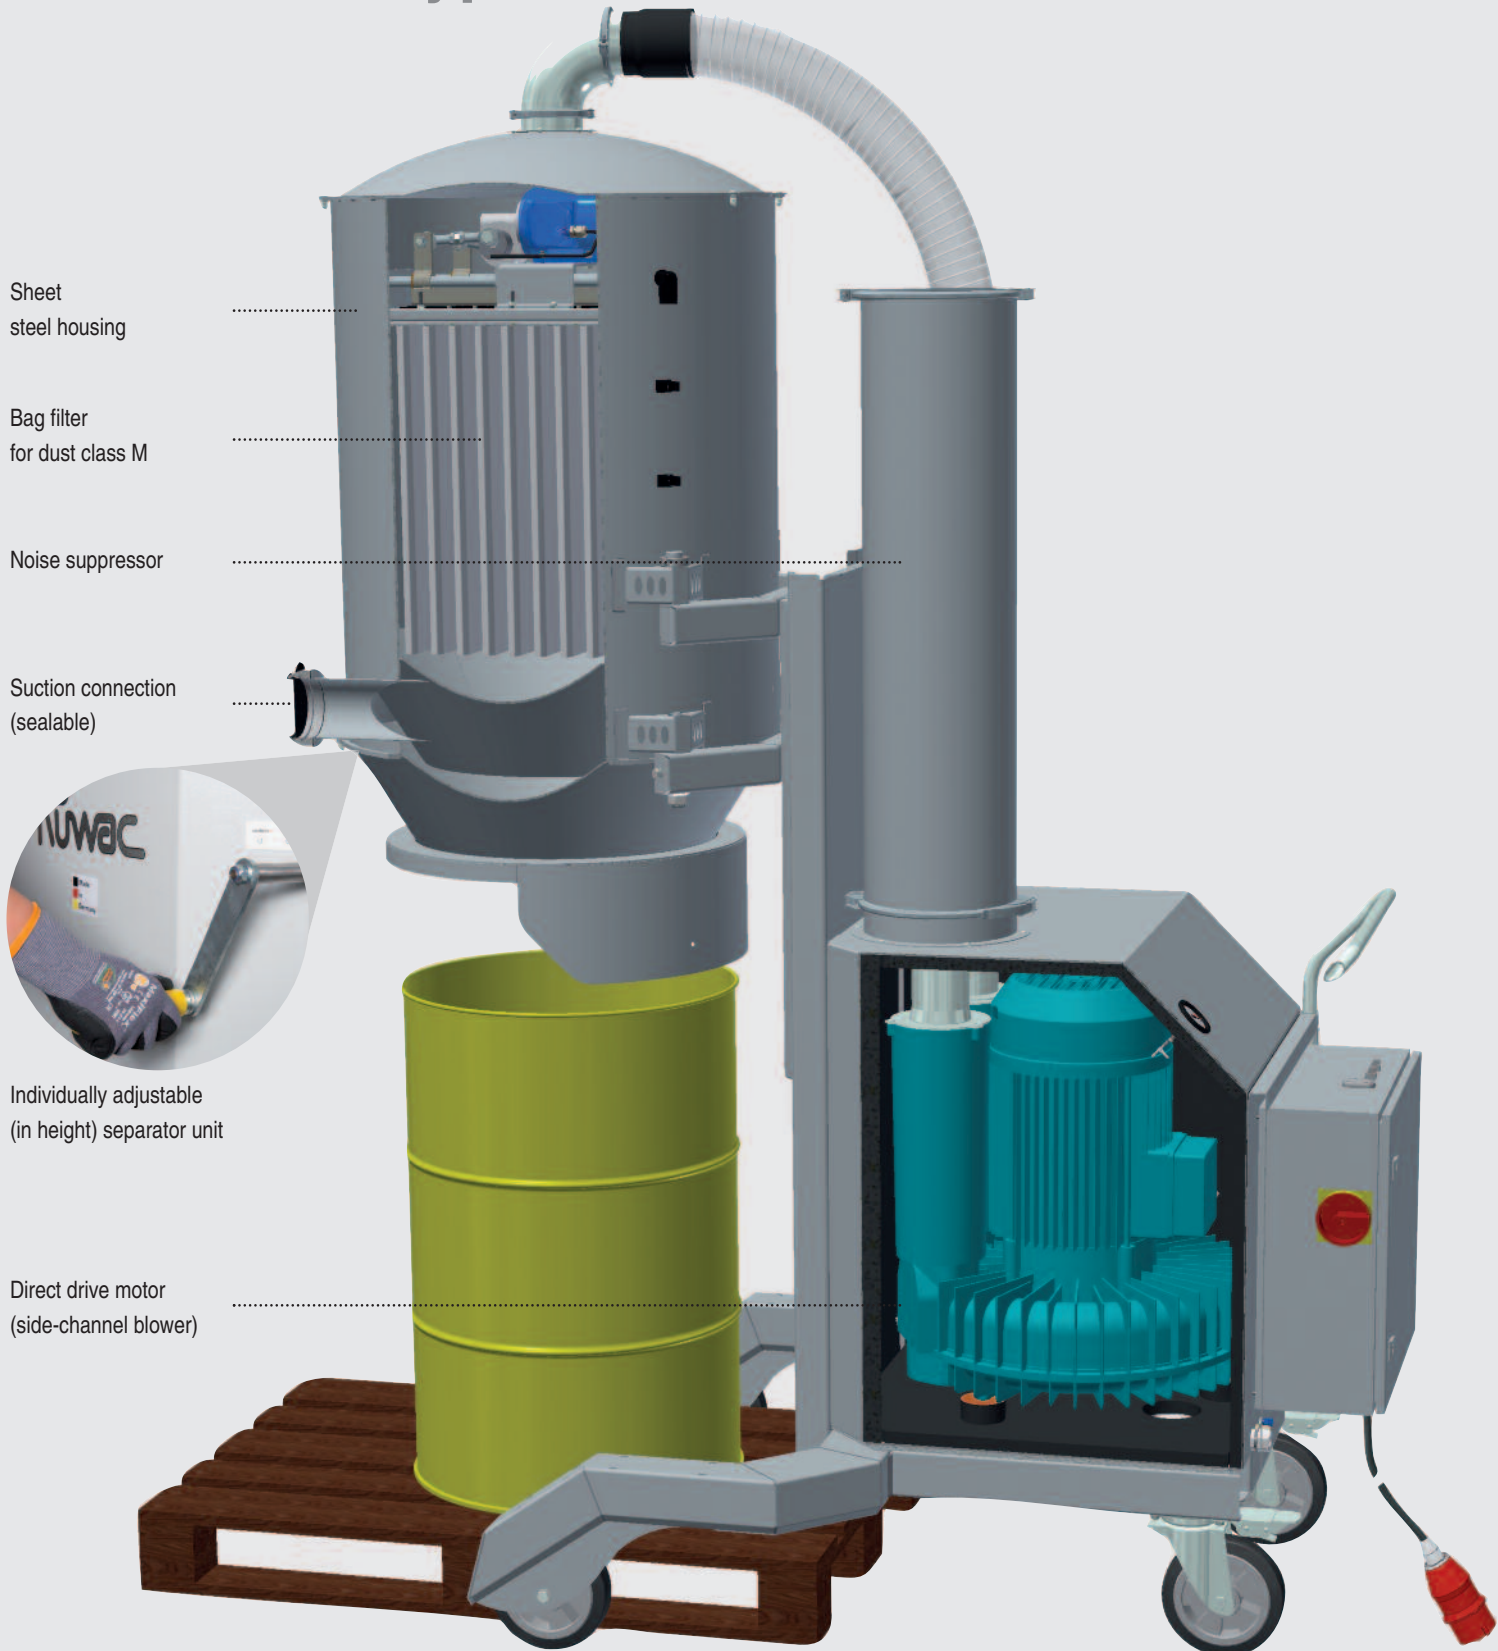

Top performance and advanced technology

- Safe intake and disposal of large quantities
- Individually and infinitely adjustable (in height) through lowering of the filtering separator unit
- Many options when it comes to selecting a pre-separator
- Variable outlet diameter
- Effective, large bag filter

Individually adjustable separator unit

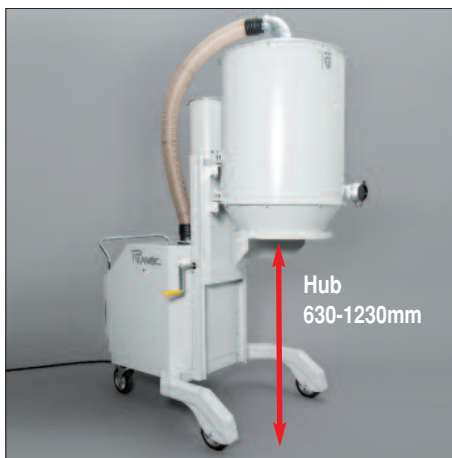

Adjusts perfectly to each separator unit

200 litre drum



200 litre drum on Euro pallet

200 litre drum with tilting mechanism and fork pockets



200 litre drum with trolley

Technical data

DA 5150

Housing	Sheet steel
Motor power (kW)	15
Voltage (V)	400
Vacuum (mbar)	- 310
Vacuum (short-term) (mbar)	- 350
Air flow rate (m ³ /h) (measured with 3m hose)	860
Sound pressure level (dB(A)) DIN 45635-01-KL3	75
Bag filter for dust class M (m ²)	4,5
Residual dust filter for dust class H (m ²)	10
Height not including pre-separator, lowered (mm)	2.100
Width (mm)	1.110
Length (mm)	1.900
Protection class IP	54
Capacity (litres)	varies
Lift of separator unit (mm)	630 - 1.230

Ruwac
Industriesauger



RUWAC
Industriesauger GmbH
Westhoyeler Str. 25
49328 Melle-Riemsloh

Telefon: 0 52 26 - 98 30-0
Telefax: 0 52 26 - 98 30-44
www.ruwac.de
ruwac@ruwac.de

Industrial vacuums are available in explosion-proof versions in accordance with ATEX 94/9/EC.



DIN EN 60335-2-69, Anh. CC



ATEX 94/9/EG



DIN EN 60335-2-69, Anh. AA